

HOLTKÖTTER®

The Ultimate Lighting Machines™


205 Hardman Avenue South, South Saint Paul, MN 55075
Voice: (800) 899-5444 • Fax: (888) 552-8661
e-mail: customerservice@holtkoetter.com
www.holtkoetter.com

This low-voltage LED floor lamp comes fully assembled.

Technical Specifications

| | |
|-----------------------------------|--|
| Light Engine: | Holtkötter PC Board LED 13-2 with Two-Tone LED Technology |
| Optic / Reflector: | Holtkötter Aluminum Reflector with precise Color Blend Optics |
| Light Output: | 525 / 595 Lumens (Σ 1120) |
| Light Color: | 3000 / 6000 Kelvin |
| Control/LED Driver/Dimmer: | Holtkötter Dimm-System LED with Dual Color Control full-range dimming of < 1% - 100% |
| Maximum Current/Voltage: | 1000mA & 14V |
| System Power Consumption: | 2 . . . 14 Watts |

Equipped with two dimmers located on the reflector.

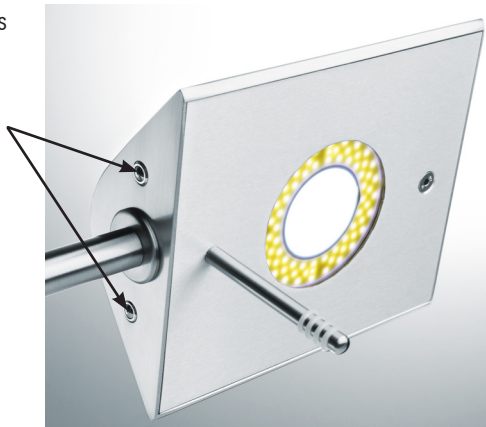

Detail of LED Reflector

ASSEMBLY INSTRUCTIONS FOR

Color Blend LED Floor Lamp

No. 9602*LED

Congratulations, you have just purchased the leading-edge dimming technology from Holtkötter International, Inc. Our "Dimm-System Punkt 1" (Dimming System Punkt 1 (*P1)) is specifically designed to provide specialized features for ease and convenience of use.

Features of "Dimm System Punkt 1" include:

Point Dimming - the lamp may be turned on or off with a single click of the P1 dimmer. Each switch operates one type of LED.

Dimming Cycle - to adjust the lamp to the perfect light level for any situation, press and hold the P1 dimmer. The dimmer will cycle from the last dimmer setting. Press and hold it again to adjust as needed. When the lamp achieves the light level of your choice, release the P1 dimmer.



Care Instructions

Use only a soft, dry cloth to clean. If necessary, a slightly damp, soft cloth can be used to spot clean. Do not use common household cleaners on lamps or fixtures, as the lacquer on the outside of the brass may be damaged as a result. Enjoy your new Holtkötter lamp.