
HOLTKÖTTER INTERNATIONAL, INC.

155 Hardman Avenue South, South St. Paul, MN 55075

fax: (888) 552-8661 • phone: (800) 899-5444

www.holtkoetter.com

e-mail: customerservice@holtkoetter.com

Please be sure the following parts are enclosed:

1. Pendant frame and canopy
 - A. Crossbar strap attached with finished nuts
 - B. White metal ring to hold glass
 - C. Three white knobs to hold metal ring onto fixture
 - D. Large Finished Glass Shield Knob
2. Glass Shade
3. Glass Shield

IT IS FIRMLY RECOMMENDED THAT A LICENSED ELECTRICIAN INSTALL THIS FIXTURE.

Installation instructions


1. Unscrew the finished nuts from the canopy to separate the fixture from the crossbar strap.
2. Mount the crossbar strap to the outlet box before making the wire connections.
3. Connect the wires from the pendant with the wires in the outlet box according to generally accepted electrical standards.
4. Mount the fixture to the crossbar strap by securing the finished nuts to the crossbar strap.
5. In order to install the glass, remove the three white knobs holding the white metal ring in place. Remove the white metal ring.
6. Slide the glass in place against the fixture, put the ring back in place and hand-tighten the white knobs in place to secure the glass. Do not over tighten.

ASSEMBLY INSTRUCTIONS FOR

Halogen Pendant 5123/3

7. Install the three bulbs. **NOTE: BE CAREFUL NOT TO TOUCH THE BULB WITH YOUR BARE HANDS.** Insert the bulb into the bayonet socket by pushing it slightly down into the socket and then turning it clockwise.
8. Install the glass shield. Remove the large finished nut from the bottom stem of the fixture. Carefully place the glass shield over the stem, making sure that the smooth side faces out. Screw the finished nut into place by hand.

Your fixture is now operational. (Please turn for height adjustment instructions).

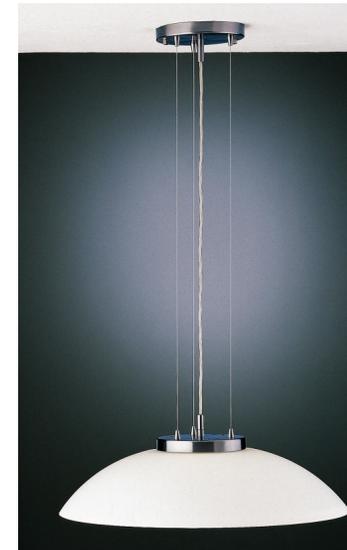

Major lamp parts manufactured in Germany by Asmuth Leuchten GmbH. Bulbs manufactured in Germany by Osram GmbH. Final assembly by Holtkötter International, Inc. in South St. Paul, MN.

Holtkötter® & Holtkötter Leuchten® are registered trademarks of Holtkötter International, Inc. All Rights Reserved.

© Holtkötter International, Inc.

Height Adjustment

1. First adjust the length of the electrical cord. Be sure to let more cord out than necessary, so that the wire cables support the weight of the fixture. Loosen the center stem of the canopy and push the wire up to shorten. Tighten the stem to hold the cord in place.
2. Adjust the length of the cables to support the weight of the fixtures. To shorten the cable, simply push the cable upwards. To lengthen the cable, press the smallest point of the cable holder upwards. When the point is pressed upward, the cable will be released for adjustment. When the point is released, the cable is again secured.

Please be aware that the cable holders are the supports for the pendant and should be adjusted one at a time.

ASSEMBLY INSTRUCTIONS FOR **Halogen Pendant 5123/3**

