

HOLTKÖTTER INTERNATIONAL, INC.

155 Hardman Avenue South, South St. Paul, MN 55075

fax: (888) 552-8661 • phone: (800) 899-5444

www.holtkoetter.com

e-mail: customerservice@holtkoetter.com

Please make sure that the following parts for your fixture are enclosed:

1. Fixture (Max. 60 Watts for each socket)
2. Backplate and hanging hardware.
3. Glass (3 each including bulbs)

Bulb wattage is determined by glass choice as follows:

60 Watt Xenon, Clear - Europa Satin Glass & Europa Brilliant Glass

40 Watt Xenon, Frosted - Bubble, Victorian, Frosted Band, Hand Etched & Blossom

It is recommended that this fixture be installed and hung by a licensed electrician.

HEIGHT ADJUSTMENT (Diagram I)

If you need to adjust the height of the fixture, loosen the stem (A) at the backplate (B) of the fixture and pull the cord to the desired length. Retighten the stem (A) at the backplate.

GLASS & BULB INSTALLATION (Diagram I & Diagram II)

1. Raise the metal stem (D) above the socket (C) and unscrew the ring (E) from the socket. Slide the glass onto the socket and hand-tighten the ring back into place.
2. Install the new bulb into the socket.
3. Lower the glass and metal stem (D) back into place.

Major lamp parts manufactured in Germany by Holtkötter Leuchten GmbH.
Final assembly by Holtkötter International, Inc. in South St. Paul, MN.

ASSEMBLY INSTRUCTIONS FOR

Pendant Series 5116/3 & 5128/3

Diagram I


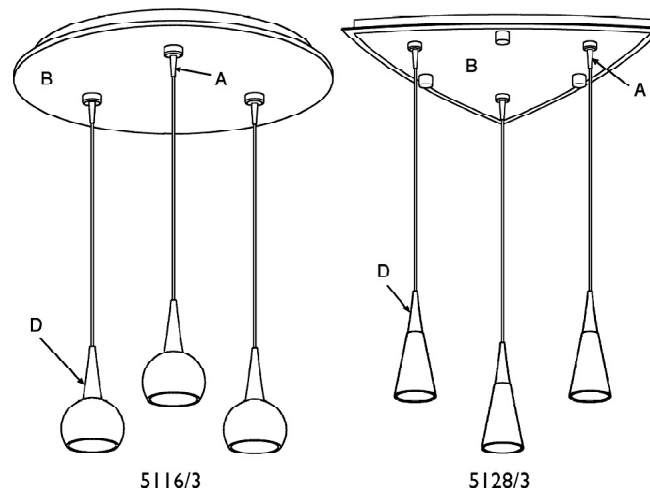


Diagram II

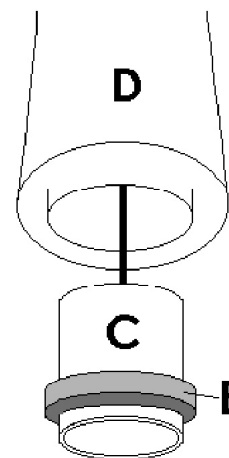

Holtkötter® & Holtkötter Leuchten® are registered trademarks
of Holtkötter International, Inc. All Rights Reserved.

© Holtkötter International, Inc.