

HOLTKÖTTER INTERNATIONAL, INC.

155 Hardman Avenue South, South St. Paul, MN 55075

fax: (888) 552-8661 • phone: (800) 899-5444

www.holtkoetter.com

e-mail: customerservice@holtkoetter.com

Please make sure that the following parts for your lamp are enclosed:

- A. Reflector
- B. Aluminum Ring (attached to lamp)
- C. Glass Shield
- D. Allen Wrench (packed inside bulb box)
- E. Large Washer (2 each, already installed)
- F. Handle with plastic protector
- G. Small Plastic Washer (attached to reflector)
- H. Small Plastic Nut (attached to reflector)
- I. Bayonet Base Halogen Bulb
- J. Table Lamp


Care Instructions

Use only a soft, dry cloth to clean. If necessary, a slightly damp, soft cloth may be used to spot clean.


Do not use common household cleaners or brass cleaners on lamps or fixtures, as the lacquer on the outside of the brass may be damaged as a result.

Enjoy your new Holtkötter lamp.


Bulb & Reflector Installation

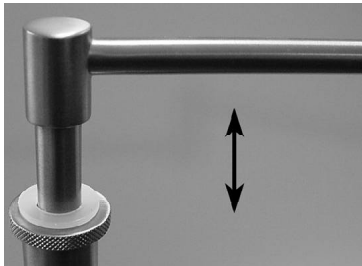


Step 1. The brass arms are made of soft, high-quality brass that is pliable and may be bent from shipping. If necessary, apply pressure to straighten.

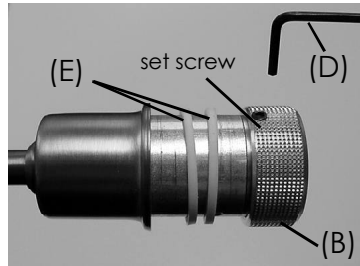


Step 2. Loosen the set screw with the allen wrench (D). Then unscrew the aluminum ring (B) from the lamp arm. Remove one of the large washers (E).

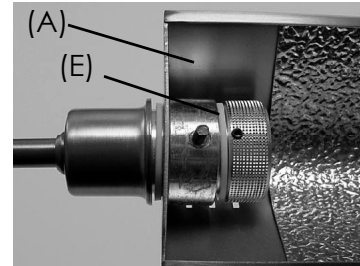

Step 3. Slide the reflector (A) over the socket. Place the large washer (E) that was removed back onto the socket. Screw the aluminum ring (B) back onto the socket until it is tight. Tighten the set screw on the aluminum ring into place. **DO NOT OVERTIGHTEN. MAKE SURE THE REFLECTOR IS STILL LOOSE ENOUGH TO TURN.**

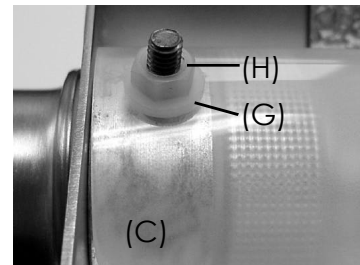


Step 5. Align the glass shield (C) with the small screw extending from the bottom of the socket. Place the small washer (G) and the small plastic nut (H) over the screw and finger tighten.

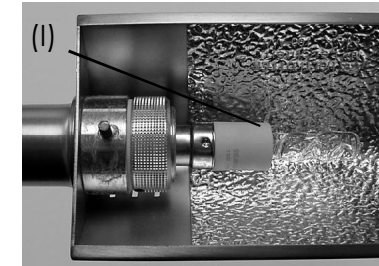

Step 4. Put the 100-Watt halogen bulb (I) into the socket. Hold the bulb at the porcelain grip, push it down slightly and turn it clockwise. **BE CAREFUL NOT TO TOUCH THE BULB ENVELOPE WITH YOUR BARE HANDS.**

Note of Caution: The recommended replacement bulbs for this fixture are 100 W Osram Bayonet Base Halogen bulbs. Use of other brands of unknown quality may cause a risk of overheating.

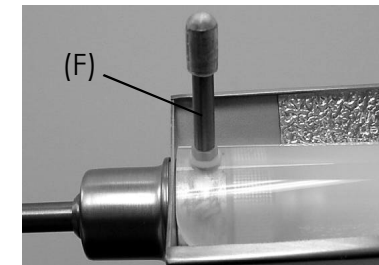

Step 6. Next, screw on the handle (F) and finger tighten. **DO NOT OVERTIGHTEN – THE GLASS SHIELD MAY CRACK UNDER TOO MUCH PRESSURE.**

Step 7. Plug the lamp cord into the wall outlet. Your lamp is now operational.

Major lamp parts manufactured in Germany by Holtkötter Leuchten GmbH.
Bulbs manufactured in Germany by Osram GmbH.
Final assembly by Holtkötter International, Inc. in South St. Paul, MN.

Holtkötter® & Holtkötter Leuchten® are registered trademarks of Holtkötter International, Inc. All Rights Reserved.

© Holtkötter International, Inc.