

---

# HOLTKÖTTER®

The Ultimate Lighting Machines™

205 Hardman Avenue South, South Saint Paul, MN 55075  
Voice: (800) 899-5444 • Fax: (888) 552-8661  
e-mail: [customerservice@holtkoetter.com](mailto:customerservice@holtkoetter.com)  
[www.holtkoetter.com](http://www.holtkoetter.com)

---

## **UL requires the following safety instructions:**

---

Lighted lamp is HOT!

**WARNING:** Improper use of this fixture may increase the risk of FIRE, ELECTRICAL SHOCK, EXPOSURE TO EXCESSIVE RADIATION or INJURY TO PERSONS.

## **IN ORDER TO REDUCE THESE RISKS, PLEASE FOLLOW THESE SAFETY INSTRUCTIONS:**

1. Before replacing bulb, DISCONNECT power and allow bulb to cool.
2. DO NOT touch hot glass shield or operate lamp with a missing glass shield.
3. Keep lamp away from materials that may burn.
4. Do not remain in light if skin feels warm or look directly at a lighted bulb.
5. Use of the Osram bulb provided with this lamp prevents exposure to excessive UV Radiation. Use of any other bulb may cause a risk of exposure to excessive UV Radiation and may also cause a risk of overheating or may rupture the bulb.

---

## ASSEMBLY INSTRUCTIONS FOR

# Halogen Wall Sconce

## No. 8503

---



## **Care Instructions**

---

Use only a soft, dry cloth to clean. If necessary, a slightly damp, soft cloth can be used to spot clean. Do not use common household cleaners on lamps or fixtures, as the lacquer on the outside of the brass may be damaged as a result. Enjoy your new Holtkötter lamp.

# HOLTKÖTTER®

e-mail: customerservice@holtkoetter.com

www.holtkoetter.com



Please make sure that the following parts for your wall sconce are enclosed:

- A. 60 Watt frosted Halopin Bulb (2 each)
- B. Glass Shield (two attached to fixture)
- C. Allen wrench
- D. Wall Sconce


**IT IS FIRMLY RECOMMENDED THAT A LICENSED ELECTRICIAN INSTALL THIS FIXTURE. DISCONNECT POWER BEFORE SERVICING.**

## General Installation Instructions

1. Loosen the set screw (F) with the allen wrench (C) provided. Remove the universal crossbar strap (G) from the back of the sconce.
2. Keeping the wires threaded through the crossbar strap, connect the wires from the sconce with the wires in the outlet box according to generally accepted electrical standards.
3. Mount the universal crossbar strap (G) to the outlet box.
4. Put the fixture (D) onto the aluminum stem attached to the crossbar strap.
5. Making sure the fixture is level, tighten the set screw (F) with the allen wrench (C).



## ASSEMBLY INSTRUCTIONS FOR Halogen Wall Sconce No. 8503

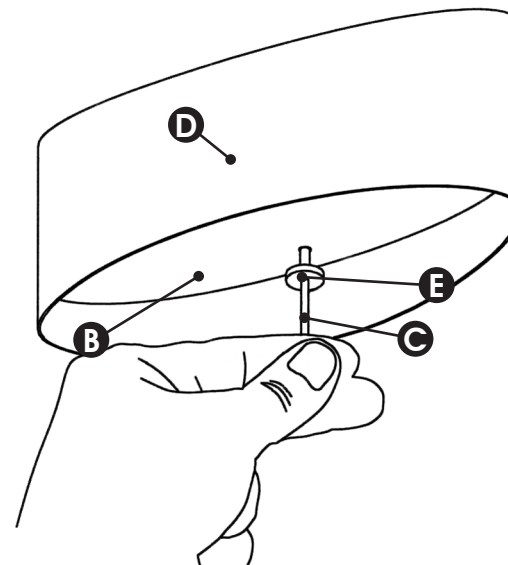

## Install or Replace Bulb

1. Disconnect power to the wall sconce.
2. Using the allen wrench (C) provided, unscrew the finished nut (E) located on the glass shield. Remove the glass shield (B).
3. Insert the Halopin bulbs (A) by pushing them gently down into the socket. **NOTE: BE CAREFUL NOT TO TOUCH THE BULB WITH YOUR BARE HANDS.**
4. Reinstall the glass shield using the previously removed finished nut (E).

