

HOLTKÖTTER®

The Ultimate Lighting Machines™

2915 Commers Drive, Suite 1000, Eagan, MN 55121
Voice: (800) 899-5444 • Fax: (888) 552-8661
e-mail: customerservice@holtkoetter.com
www.holtkoetter.com

Please make sure that the following parts for your lamp are enclosed:

1. Swing-Arm Wall Sconce
2. Reflector Kit
 - A. Metal reflector (9416/1) **or** Glass reflector (9426/1)
 - B. Frosted glass shield
 - C. Bulb supplied:
Halogen Halopin G9 base bulb, Order Code: 9250*075-HPNCL (75 Watts)
 - D. Optional bulbs:
 - Maximum 100 Watt G9 base halogen (socket rating up to 100 W).
 - LED G9 (dimming range with LED: 10%-100%)

IT IS FIRMLY RECOMMENDED THAT A LICENSED ELECTRICIAN INSTALL THIS FIXTURE.


Installation Instructions

1. Remove the universal crossbar strap from the back of the sconce.
2. Connect the wires from the sconce with the wires in the outlet box according to generally accepted electrical standards.
3. Mount the crossbar strap to the outlet box after making the wire connections.
4. Mount the fixture to the crossbar strap.
 1. Insert the bulb (C) into the socket. The bulb is inserted by pushing it down into the socket. **Best practice** for halogen bulb longevity is to avoid touching the bulb with bare hands prior to installation.
 2. Set the glass shield (B) on the grooved counterpart of the reflector (A).
 3. Screw the reflector onto the sconce. Holding the reflector with one hand, and the glass shield with the other hand, place the reflector and glass shield over the bulb and onto the base. Turn the reflector clockwise until it is completely assembled.
 4. Your wall sconce is now operational.

ASSEMBLY INSTRUCTIONS FOR

Halogen Swing-Arm Wall Sconce

No. 9416 & No. 9426

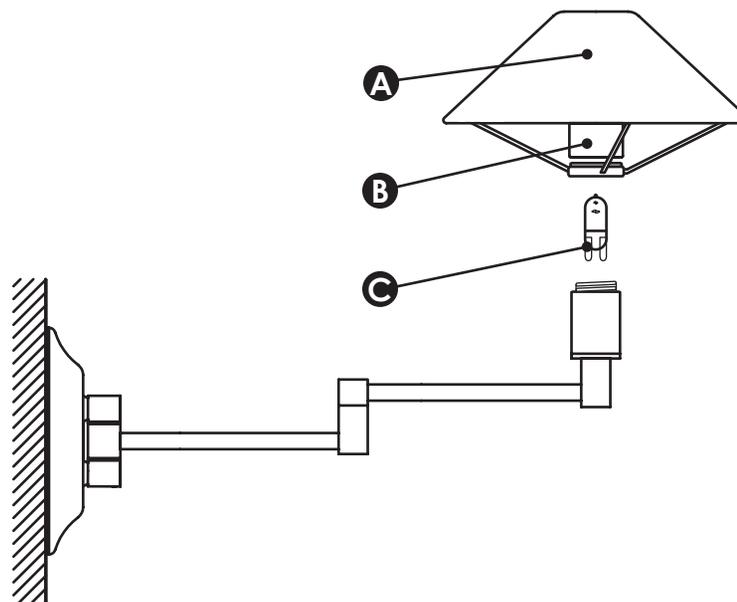

Care Instructions

Use only a soft, dry cloth to clean. If necessary, a slightly damp, soft cloth can be used to spot clean. Do not use common household cleaners on lamps or fixtures, as the lacquer on the outside of the brass may be damaged as a result. Enjoy your new Holtkötter lamp.